


USER MANUAL

SAMADHI
Active Stereo Speaker

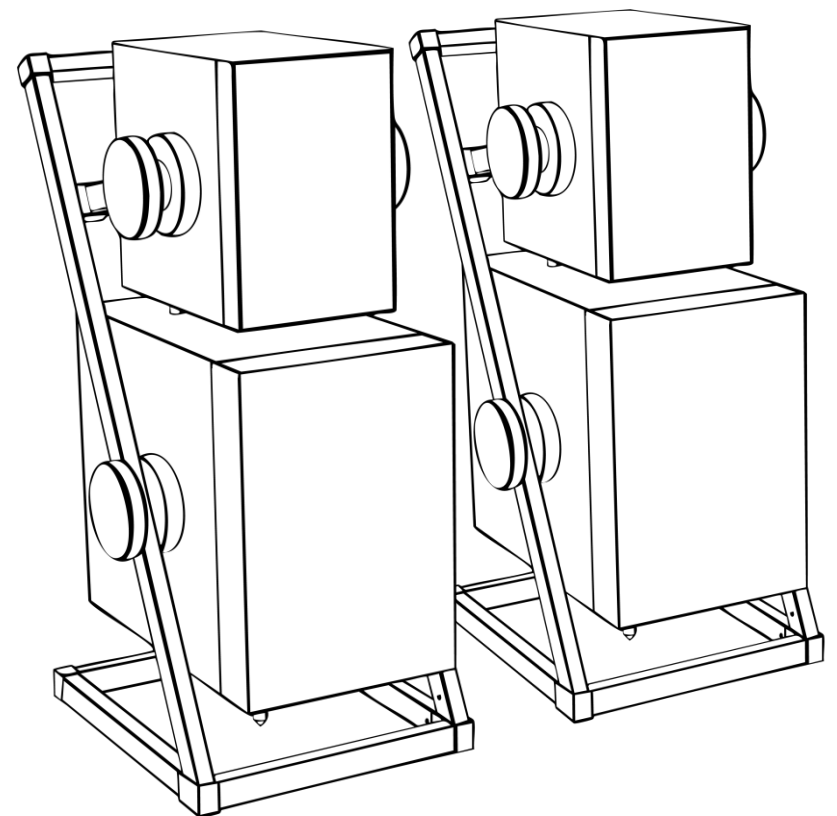

Thank you for purchasing the Goldmund SAMADHI.

Please take some time to read this manual. It provides you with useful information to make your pleasure of listening to the SAMADHI even higher.

INTRODUCTION

SAMADHI Active Stereo Speaker

Since 1978, Goldmund has been dedicated to developing audio equipment of the highest quality and accuracy to immerse you in the most realistic audio experience possible.

At Goldmund, we are committed to being at the forefront of the creation, development, and manufacture of the industry's most advanced technologies, including audio systems and music distribution.

Our aim is to provide the most accurate sound possible, with the least possible loss of quality during the various stages. With a team of rigorous engineers, Goldmund is constantly pushing back the boundaries of the exceptional to keep developing its own ever more innovative technology.

! W A R N I N G !

Only careful use can provide the satisfaction you are expecting from this product.

All handling must be performed according to the following instructions to avoid impairing the speaker's performance.

Nevertheless, if the instructions are carried out in full, you will notice that the use of the SAMADHI is quite simple and convenient.

IMPORTANT

PLEASE DO NOT CONNECT ANY CABLES OR MOVE ANY PARTS BEFORE READING THE FOLLOWING INSTRUCTIONS.

TABLE OF CONTENTS

1	PRELIMINARIES	5
2	UNPACKING	5
3	SELECTING THE SPEAKER LOCATION	6
4	CONNECTIONS	7
5	RUNNING IN	9
6	MAINTENANCE AND CLEANING	9
7	TECHNICAL DATA	10

1

PRELIMINARIES

The SAMADHI loudspeaker uses revolutionary technologies to achieve a level of definition and neutrality never reached before in a loudspeaker system.

For optimal use of your active speakers, please carefully read the following instructions. For professionals, musicians and all those who expect the very best in audio reproduction, we advocate the use of the highest quality components, especially in terms of electronics and cables.

2

UNPACKING

SAMADHI loudspeaker requires special care when unpacking. We recommend that four people unpack and install the loudspeaker, as certain operations require a great deal of attention.

You will find the following components within the custom packaging:

- Speaker Pair
- Power Cord
- USB dongle
- User Manual

ATTENTION

Should you need to return the speakers to the factory or to your local representative for warranty repair, please note that they must be repacked in the original packaging. This packaging has been specifically designed to protect the speakers during transit. Use of any other packaging will inevitably result in damage which cannot be covered by the warranty.


3

SELECTING THE SPEAKER LOCATION

SAMADHI requires a rigid floor to fully benefit from Goldmund's Mechanical Grounding™ technology. This system channels vibrations away from the structure, reducing resonance and preserving sound purity. Its adjustable feet provide stability while ensuring the grounding tip connects with the floor to dissipate vibrations effectively.

In stereo, the ideal placement of the speakers in the room should be determined by experiment. Avoid placing the speakers in a corner of the room and try to keep them at least 60 cm (2 feet) away from an adjacent wall. The ideal listening position is about 1 to 1.5 times the distance between the speakers at equal distance from each speaker. If the room size allows, try to separate the speakers by at least 3 m (10') to achieve a large stereo image.

For a multi-channel system arrangement, it is recommended to place the speakers as close as possible to the positions shown in the figure below:

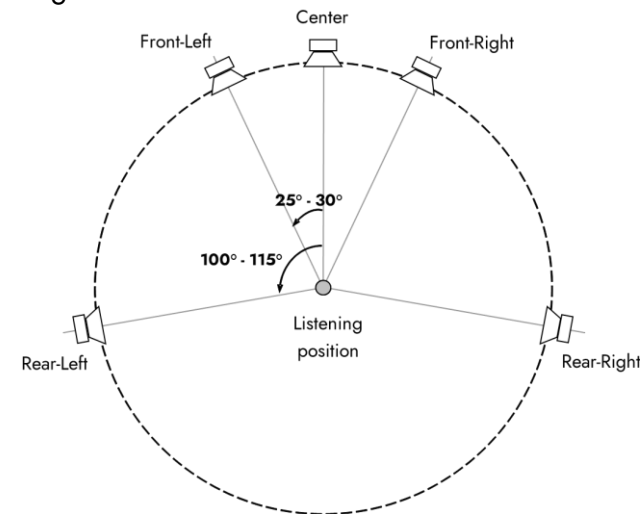

Depending on the room acoustics, the speakers may be standing parallel or slightly tilted towards the listener.

4

CONNECTIONS

POWERING ON

Connect the loudspeaker to a mains outlet using the provided power cords enclosed within the packaging.

WIRING

The SAMADHI active loudspeaker is equipped with built-in amplifiers featuring integrated input DSP crossovers. The input is an unbalanced digital connection (S/PDIF).

When utilizing a digital input signal, connect the digital cable to the digital input port of the SAMADHI loudspeaker. Attach the opposing end of the digital cable to the output port of a digital processor (please visit the Goldmund website to explore the current product offerings). The presence of a digital processor is essential for linking the loudspeakers to the audio source.

WIRELESS

The effective range of the wireless audio link is influenced by various factors, including the density of nearby WiFi devices in the vicinity of the SAMADHI system, the composition of building materials and the room's architectural layout. Considering these variables, the maximum wireless range typically spans between 5 to 20 meters.

For optimal performance, please adhere to the following guidelines:

- Place the SAMADHI loudspeaker, USB dongle, or Wireless Transmitter within the same room.
- Avoid introducing metallic obstacles between the USB dongle or Wireless Transmitter and the SAMADHI, as this could potentially disrupt the wireless connection.
- Refrain from relocating the computer along with the USB dongle during audio playback.

SETUP PROCEDURE


- Connect the USB dongle to a USB port on your computer or connect the Wireless Transmitter to the corresponding output channel of your acoustic processor or Wireless Hub.

4

CONNECTIONS (Ctd.)

ATTENTION:

Due to SAMADHI's high gain, please ensure that the media player / computer audio settings are set to a low output level before connecting the speakers.

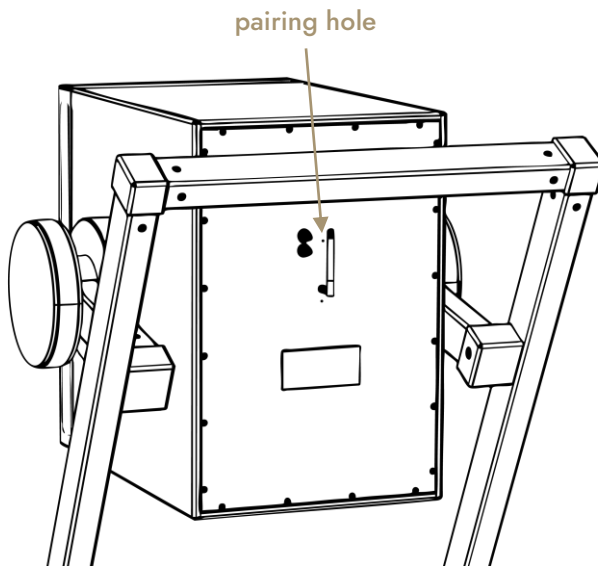**SETUP PROCEDURE (Ctd.)**

- If using the USB dongle, access your computer's audio settings to designate the USB dongle as the preferred audio output. Alternatively, if employing the Wireless Transmitter, get in touch with your Goldmund representative, who can assist in loading and modifying the configuration file within your acoustic processor.

The system is now configured and ready for operation. Volume adjustments can be made directly from your computer (when using the dongle), or from the acoustic processor (when utilizing a Transmitter), or directly on the Wireless Hub.

The SAMADHI and the associated USB Goldmund dongle are delivered prepared. However, if you would like to do a re-pairing of the speaker with the dongle for any reason, please follow these steps:

- Either plug the USB dongle into your computer or link the Wireless Transmitter to your acoustic processor or Wireless Hub.
- Insert a small screwdriver into the pairing hole located on the back panel of the Tweeter/Medium's speaker box.
- Gently press the internal pairing button using the screwdriver.
- As soon as the pairing is done, the locking LED will light up.
- The pairing is done.

Should the USB dongle be misplaced, a replacement can be ordered from your distributor, who will also facilitate the pairing process with your loudspeakers.

The digital signal undergoes processing through the Proteus technology. SAMADHI does not employ active filtering (hardware crossover). Instead, the SAMADHI utilizes comprehensive digital filtering, with the crossover operation executed through software integrated within the DSP speaker board.

4 CONNECTIONS (Ctd.)

Modification and loading of the configuration file should only be undertaken by an authorized Goldmund representative. Please refrain from making changes yourself. Incorrect settings can cause damage to the speakers. Factory modifications not approved by an official Goldmund representative will not be covered under warranty.

The SAMADHI active loudspeaker is designed to power on automatically upon receiving modulation. In instances where the digital input remains inactive for a duration of 3 seconds, the speaker drivers will enter a muted state. This muting is lifted promptly upon the presence of a signal on the digital input. Please do not disconnect the main power while the SAMADHI is not muted. Allow a 3-second pause after the music stops before disconnecting the mains power.

5 RUNNING IN

The SAMADHI active speaker undergoes thorough factory testing. However, akin to any high-quality speaker system, the SAMADHI requires several days of playing music to reach its peak sonic performance as intended. The initial few hours of usage might prove challenging for discerning listeners.

Feel free to play the speakers at a reasonably high volume for a period to facilitate optimal performance before proceeding with system adjustments or positional fine-tuning.

6 MAINTENANCE AND CLEANING

For cleaning the metal case of the speaker, employ a clean, soft cloth that has been slightly dampened with water or a mild detergent solution. Avoid the use of abrasive or harsh cleansers containing substances such as sodium carbonate.

The identification plate features a precious metal plating. A soft cloth suffices for its cleaning; there is no need for any chemical solutions.

7

TECHNICAL DATA

per unit

FREQUENCY RESPONSE

- 22 Hz (-6 dB) > 25 kHz

DRIVERS

- 1 x soft dome tweeter
- 2 x 7" medium
- 1 x 12" woofer

selected for their high linearity and dynamics

AMPLIFIER

Built-in 700 W Telos amplifier:

- 2 x 200 W Telos amplifier for tweeter & medium
- 1 x 300 W Telos amplifier for woofer

BASS LOAD

- Vent loading

INPUTS

- 1 x digital S/PDIF input
- 1 x wireless audio input

VOLTAGE

- Nominal range: 115 V or 230 V (+/-15 %)
- Fuses: 8 A slow-blow type for 115 V & 230 V

7

TECHNICAL DATA (Ctd.)

per unit

RATED POWER CONSUMPTION

- 480 W

SIZE & WEIGHT

- 72 W x 147 H x 82 D (cm)
- 28.3 W x 57.9 H x 32.3 D (in)
- 180 Kg



GOLDMUND
SWISS MADE

Information and product specifications contained
in this manual are subject to change without
prior notice.

Visit our website at www.goldmund.com